



→ Cassette lift for factory built panel vans

DH-C001.03 • 300 kg



The platform of the DH-C001.03 stows neatly in a sealed cassette box under the loading floor of the vehicle. This solution keeps the **access through the rear doors free**, and occupies **no space inside the vehicle**.

The DH-C001.03 can be mounted to most types of commercial vans with a max. floor height of 850 mm.

The flat platform is suitable to handle roll-cages, small machines & equipment, white & brown goods, etc... It is not suitable to manipulate pallets.

To keep this lift light, simple and budget friendly, the retraction of the platform is done by hand. Hydraulic retraction is available on the lift model DH-CH001.03

Lift capacity

CAP	CG	LM
300 kg	500 mm	1.5 kNm

Weights [see pg. 19]


ALU platform	
Std.	145 kg

Handy to have on board, for the occasional use



Fitting dimensions

larm	700
vfh max.	875
mfu max.	525
mfu min.	335
mug max.	350
lch	145
lcl	1115

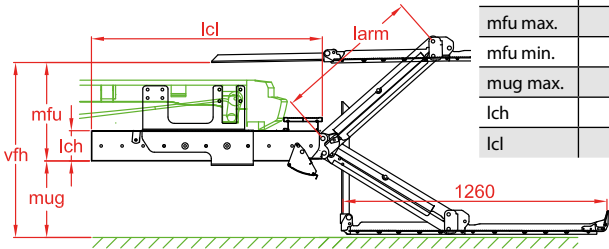

Technical specifications

Lift frame	2 lift arms
Cylinders	2 lift cylinders + 2 fixed stabilisers
Type of ride [see pg. 8-9]	Flat platform, level ride
Retraction in / out	<ul style="list-style-type: none">• Manual• Automatic retraction possible with model DH-CH001.03
Platform material	Steel frame + aluminium profiles
Platform equipment	<ul style="list-style-type: none">• Fixed platform point• Automatic roll-stop as option [OWH100]• Bridge plate and toe-guard at the front edge of the platform
Standard platform dimensions	1260 x 800 mm
Std. control unit [see pg. 11]	OAE001
Standard finish of the lift frame	Protection PLUS [OAT102]