



→ Fold-away lift for trucks

## DH-RC.15 • 1000 - 1500 kg



The DH-RC.15 is the medium-duty model in the range of fold-away lifts with **level ride** between the vehicle floor and the ground, plus **automatic tilt at ground level**. Despite the narrow arms situated between the chassis rails, it offers **excellent lateral stability and overall performance**.

When comparing to other fold-away lifts with 1500 kg capacity, the DH-RP.15 offers a wide arm-center and 2 lift cylinders, but only half-dip ride. The DH-RM.20 is a heavier-duty model, but weighing heavier and offered at a higher budget. Like all other fold-away lifts, the hidden storage under the chassis is **ideal for frequent access to loading docks**.

The DH-RC.15 is primarily designed for trucks up to 26 T GVW, but can also be mounted on semi-trailers. A special execution for refrigerated bodies is available as an option [OAP628].

### Lift capacity


CAP	CG	LM
1000 kg	600 mm	6 kNm
1500 kg	600 mm	9 kNm

### Weights [see pg. 19]

ALU / ALU		STEEL / ALU	
1250mm	358 kg	1250mm	395 kg
1450 mm	368 kg	1450 mm	415 kg


Weights incl. CE bumper

# Medium capacity fold-away lift

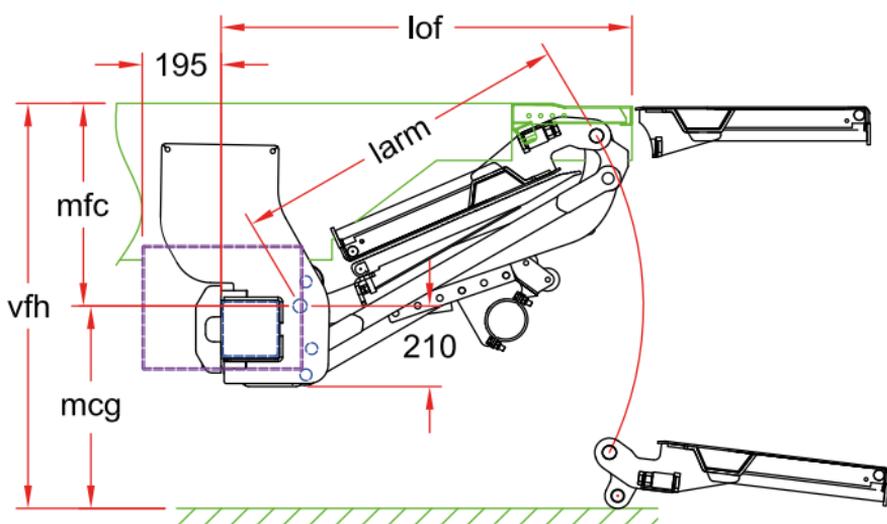

## Fitting dimensions

larm		880	980
vfh max.		1385	1510
vfh min. loaded		1010	1105
mfc max.		745	860
mfc min.		450	450
mfc max.		640	650
lof	at mfc max.	870	905
lof	at mfc min.	1120	1230
pd max.		1250	1450



## Technical specifications

Lift frame	150 x 150 mm
Cylinders	1 lift cylinder + 2 fixed stabilisers
Type of ride [see pg. 8-9]	Wedged platform, level ride with automatic tilt at ground level
Platform material	Steel / Alu • Alu / Alu
Standard platform depths	1250 - 1450 mm
Standard platform widths	2000 - 2200 mm Other widths on request [option OAP603]
Lift arm lengths	880 - 980 mm
Lift arm width	500 mm
Mounting	<ul style="list-style-type: none"> <li>• Rear floor plate [OAM003]</li> <li>• N-A bed extension plate + side ladders [OAM051 + OAM052.LR]</li> <li>• Adapted for refrigerated floor [option OAP628]</li> </ul>
Std. control unit [see pg. 10]	OAE030.BT
Standard finish of the lift frame	Protection PLUS [OAT102]