



→ Passenger lift for midibuses & coaches

DH-CH102.03 • 350 kg



The cassette lifts **DH-CH102.03** are usually **integrated in the lowest step** of the stairs at the middle door(s) of M3 buses and coaches.


Like the other lifts of the DH-CH100 series, this lift is equipped with a **single-piece platform** to eliminate as many moving parts as possible and reduce maintenance needs.

The DH-CH102.03 offers excellent platform stability, and guarantees superior reliability in service.

Cassette lift integrated in the stair

Weights [see pg. 19]

Steel / Alu	
CH102	235 kg +

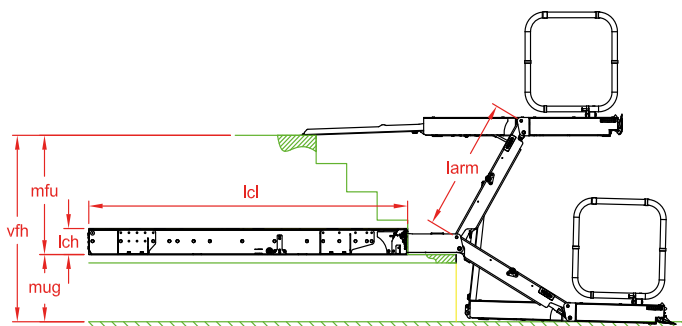

Fitting dimensions

Type	larm	CAP kg	mug max.	lch	lcl	mfu min.	mfu max.	vfh max.
CH102.03.04	800	350	500	150	1970	200	710	1210
CH102.03.05	1100	350	700	150	1970	270	970	1670

Technical specifications

Lift frame	2 lift arms
Cylinders	2 lift cylinders
Retraction in / out	Electric motor + gear wheel system
Type of ride [see pg. 8-9]	Flat platform, level ride
Standard platform dimensions	1200 x 800 mm (LxW)
Platform details	<ul style="list-style-type: none"> Aluminium platform with anti-slip surface Solid single-piece platform Automatic roll-stop at the outboard platform edge Automatic bridge plate to the vehicle floor
Safety rails	2, left & right, folding manually
Std. control unit	OWE008.2
Standard finish of the lift frame	KTL epoxy e-coating