



→ Passenger lift for coaches

DH-RB.05 • 500 kg




The **DH-RB.05** is a **powerful fold-away lift**, designed to embark and disembark the heaviest wheelchairs on or from coaches in a safe manner.

In its travel position, this lift is neatly folded away in the area **below the dedicated door on the upper aisle** of the coach.

Upon deployment, the platform is first lowered to the ground, then unfolded manually into work position.

Powerful fold-away lift for the heaviest wheelchairs

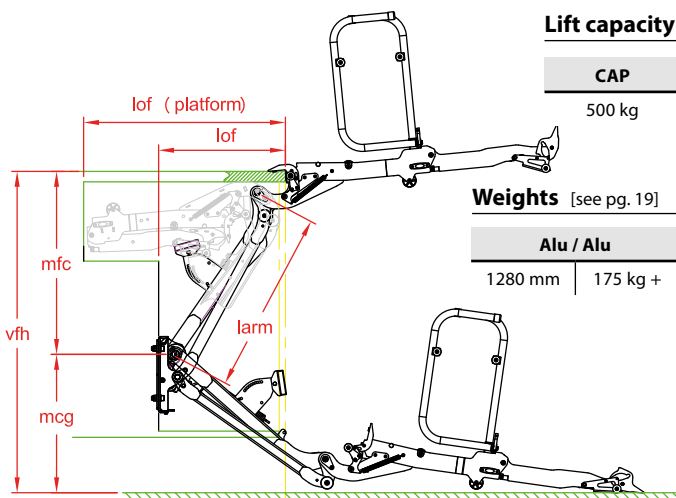

Fitting dimensions

larm	760	820	880	940	1000
vfh max.	1435	1535	1620	1720	1815
mfc max.	on request - ask for study drawing				
mcg max.	on request - ask for study drawing				
lof (platform)	± 930				

Technical specifications

Lift frame	Base plate to be bolted to the vehicle chassis
Cylinders	<ul style="list-style-type: none"> • 1 central lift cylinder for max. platform stability • 2 fixed stabilisers for the platform orientation
Type of ride [see pg. 8-9]	Wedged platform. Level ride + automatic tilt at ground level
Platform details	<ul style="list-style-type: none"> • Aluminium platform with anti-slip surface • Manual unfolding of the platform and its point • Automatic roll-stop at the outboard platform edge • Automatic roll-stop at the inboard platform edge as an option [OWP011]
Safety rails	2, left & right, folding manually
Standard platform dimensions	1280 x 800 mm (LxW) Other dimensions on request
Lift arm lengths	760 - 820 - 880 - 940 - 1000 mm
Std. control unit	OWE005.2
Standard finish of the lift frame	Protection PLUS [OAT102]