



→ Lift for vans, trucks, trailers and semi-trailers

DH-VZ.03 • 300 kg



DH-VZ1

The interior column lift DH-VZ is designed to suit a wide range of Multi Passenger Vehicles, vans, and even larger commercial vehicles.



DH-VZ2

In its travel position, the platform is **stowed against the side panel** of the vehicle. Upon use, the lift frame is turned to a work position outside the vehicle. Then the platform is opened by hand. The hydraulic lift functions are operated by means of 2 buttons integrated in the lift column.

The standard platform is made of 1 single section. **Foldable platforms** [option OAP805] are available for vehicles with insufficient door aperture, or in order to increase the overall useful platform surface.


Lift capacity

CAP	CG	LM
300 kg	500 mm	1.5 kNm

Weights [see pg. 19]

ALU platform	
Std.	140 kg

Column lift with free access through the doors

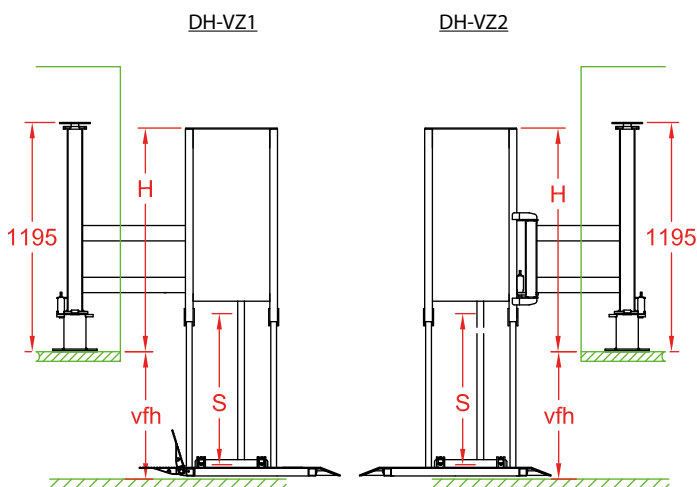

Fitting dimensions

Stroke S	750	1150 (*)	1550 (*)
vfh max.	700	1100	1500
H	1165	1565	1965

(*) option OWF012

Technical specifications

Lift frame	<ul style="list-style-type: none"> Column lift with single pillar VZ1: frame with 1 articulation point. In work position the platform stands right behind the body VZ2: frame with 2 articulation points. The platform can pivot towards the sidewalk
Cylinders	1 lift cylinder
Type of ride [see pg. 8-9]	Flat platform, level ride
Platform material	Steel frame + aluminium anti-slip top plate
Platform details	<ul style="list-style-type: none"> VZ1: hinged bridge plate at the inboard edge of the platform VZ2: platform in 1 single section
Standard platform dimensions	VZ1: 900x800 mm • VZ2: 900x1000 mm Other dimensions [OAP804] & foldable platforms [OAP805] available on request
Standard control unit	2-button control integrated in the lift column
Standard finish of the lift frame	Protection PLUS [OAT102]